

Technical data sheet

DSO-C MOBILE ELECTROSTATIC PURIFIER



dalp̄itech[®]

DSO-C MOBILE ELECTROSTATIC PURIFIER


Electrostatic purifier designed for the extraction of fumes and oil mist on machinery and in machining centres. It is equipped with a trolley with an oil recovery tank.

The filter system consists of metallic mechanical filters and of easy-wash two-stage electrostatic cells, which therefore do not require spare parts.

We recommend the combined use with a Depurex-Series articulated extraction arm or with a flexible hose with an extraction nozzle.

STANDARD MACHINE TECHNICAL DATA

Item code	MODEL	DIMENSIONS (L x D x H) mm	POWER [KW]	POWER SUPPLY [V] - [Hz]	FLOW RATE [m ³ /h]	NOISE LEVEL [dB(A)]
V36220005	DSO-C	1580x1050x900	1.5	400 - 50	2250	<70

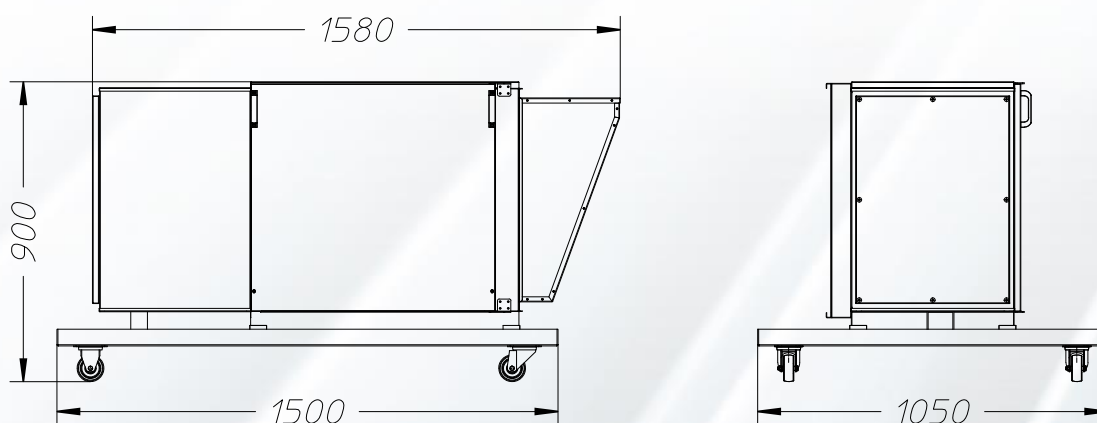

Code	Description
V36220005	DSO-C MOBILE ELECTROSTATIC PURIFIER

STANDARD FEATURES

-	ELECTRIC FAN 1.5 KW 400V
-	METALLIC PREFILTER / POSTFILTER
-	TWO-STAGE ELECTROSTATIC CELLS (IONISING + CATCHMENT)
-	EJECTION AND EXTRACTION HOODS
-	TROLLEY FOR DSO-C
-	ON-BOARD ELECTRICAL PANEL

OPTIONAL

T34230007	DEPUREX 2 EXTRACTION ARM Ø160
T34230002	DEPUREX 3 EXTRACTION ARM Ø160
S28240013	ELECTROSTATIC BLOCKAGE DETECTOR
D16520046	CORRUGATED SYNTHETIC PREFILTER
D16520027	OIL PREFILTER
M22520003	ACTIVATED CARBON FILTER
T24260028	ADDITIONAL TWO-STAGE ELECTROSTATIC CELLS (IONISING + CATCHMENT)
G14310044	HOUR COUNTER

Further customizations are possible. For information, please contact our sales office.



Here are more illustrative images of the DSO-C MOBILE ELECTROSTATIC PURIFIER

